

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
19 September 2002 (19.09.2002)

PCT

(10) International Publication Number  
**WO 02/072261 A2**

- (51) International Patent Classification: **B01L** 10549 Morning Glory Circle, Fountain Valley, CA 92708 (US).
- (21) International Application Number: PCT/US02/06342
- (22) International Filing Date: 1 March 2002 (01.03.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
60/275,761 14 March 2001 (14.03.2001) US  
10/071,726 8 February 2002 (08.02.2002) US
- (74) Agents: MAY, William, H. et al.; Beckman Coulter, Inc., 4300 N. Harbor Boulevard, P.O. Box 3100, Fullerton, CA 92834-3100 (US).
- (81) Designated State (national): JP.
- (84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
- Published:  
— without international search report and to be republished upon receipt of that report
- (71) Applicant: BECKMAN COULTER, INC. [US/US]; 4300 N. Harbor Boulevard, P.O. Box 3100, Fullerton, CA 92834-3100 (US).
- (72) Inventors: MORITZ, Jeffrey, R.; 1128 Hedgewood Place, Diamond Bar, CA 91765 (US). AVNET, Allan;
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*



**WO 02/072261 A2**

(54) Title: CONDUCTIVE PLASTIC RACK FOR PIPETTE TIPS

(57) Abstract: A conductive plastic tip rack for pipette tips includes a conductive outer shell formed around a support insert. The support insert serves as the skeleton for the tip rack, providing structural support to make the tip rack strong and sturdy. The conductive outer shell includes sidewalls depending from the sides of a face having a plurality of tip seats for receiving a plurality of pipette tips. The conductive outer shell is formed of an electrically conductive plastic. The conductive plastic rack is capable of sufficiently conducting or dissipating electricity such that static electricity existing on a pipette tip placed within the tip rack will flow out of the pipette tip and through the tip rack. By removing the static electricity from the pipette tips placed in the tip rack, static electricity is prevented from disturbing the tips seated in the tip rack.

## CONDUCTIVE PLASTIC RACK FOR PIPETTE TIPS

### BACKGROUND

The present invention relates generally to an electrically conductive plastic rack for pipette tips, and more particularly, it relates to an electrically conductive plastic rack for use with pipette tips following removal of the pipette tips from a plurality of pipettes.

Modern laboratory automation often involves conducting experiments using plates having multiple wells. These plates are known as "microplates". A typical microplate may contain three hundred and eighty four (384) wells or more. The microplate wells are used to hold specimens to be tested in a laboratory experiment. Pipettes are used to transfer liquids in and out of the microplate wells during the laboratory experiments. For example, the pipettes may transfer the initial specimens into the wells along with a number of different chemical reagents used during the laboratory experiment.

To prevent contamination of the pipettes when transferring liquid into and out of the microplate wells, a disposable polypropylene pipette tip is attached to the end of each pipette. The pipette tip carries all of the liquid to be transferred from one location to another, and prevents the actual pipette from contacting the liquid. After the transfer, the pipette tip is removed from the pipette and a new pipette tip is attached to the end of the pipette for subsequent transfers of different liquids. In this manner, precise concentrations, ingredient mixtures and amounts of liquids may be transferred using each pipette without the fear of contamination from a previous liquid transfer using the same pipette.

Multiple pipette devices are often used when conducting experiments using multiple well microplates. For example, a robotic device having three hundred eighty four (384) pipettes may be used when conducting experiments using a three hundred

eighty four (384) well microplate. Such multiple pipette devices provide for the rapid removal or insertion of liquid into every microplate well. When using multiple pipette devices, tip racks are used to hold the pipette tips to be attached to the ends of the pipettes. The tip racks hold the tips in an organized fashion and allow the tips to  
5 be quickly inserted onto the pipettes or removed from the pipettes. Like the pipette tips, the tip racks are typically formed of polypropylene for ease of manufacture and cost savings. Because the tips and racks are both formed of relatively low cost polypropylene, it is customary in the industry to discard the tips and racks after a short period of time, or even after one use, for disposal and/or recycling.

10 With reference now to Fig. 1, the head 20 of a multiple pipette device 24 is shown. The head 20 holds three hundred eighty four pipettes 22 used to transfer liquid to and from a three hundred eighty four well microplate 50. Pipette tips 30 are shown inserted on each pipette 22 of the multiple pipette device 24. The pipette tips are positioned above a tip rack 40 used to hold the pipette tips 30 when they are  
15 removed from the pipettes 22 of the multiple pipette device 24.

Before the pipettes may be used to transfer liquid to and from the microplate wells, the tips 20 must be loaded onto the pipettes. A robotic arm (not shown) typically delivers a rack 40 full of tips 30 to the loading area 42. The head then positions itself directly above the rack 40 with each pipette in alignment with one of  
20 the tips 30. The head 20 then moves downward to bring the pipettes into contact with the tips 20. Each tip 20 is secured to a pipette with a friction-fit. Thus, the head must press (or be pulled) down with a substantial force to cause the tips to slide on to the ends of the pipettes. The sliding action of the polypropylene tips against the metal mandrels causes an electrostatic charge, i.e., triboelectricity, to develop on the exterior  
25 of the tips 20.

Once the tips are loaded onto the pipettes 22, the head 20 moves the pipettes and connected tips 30 to position the tips in the wells of the microplate 50. The

pipettes then suck liquid from the wells and into the tips 30 for delivery to another location. After transferring liquid from one location to another (e.g., one microplate to another), the head returns to a position above the rack 40 so the head 20 is in position to return the used tips 30 to the rack. A shuck plate (not shown) then forces  
5 the tips from the pipettes, causing the tips 30 to fall into the tip rack 40 such that each tip is positioned in a tip seat on the tip rack. Of course, as the tips 30 are forced from the pipettes, they slide along the pipettes, once again causing an electrostatic charge to be generated and deposited upon the tips as a result of the rubbing action between the tips and the pipette. After the tips 30 are returned to the tip rack 40, the robotic arm  
10 may remove the rack full of tips for disposal or cleaning. Alternatively, the tips and rack may remain in place on the loading area for further use by the multiple pipette device.

Unfortunately, once the tips are returned to the rack, the triboelectric effect often creates a problem with the tips in the tip rack. In particular, when the  
15 polypropylene tips are returned to the polypropylene rack they each contain an electrostatic charge as a result of the rubbing action between the pipettes and tips during loading and unloading of the tips on the pipettes. The polypropylene tip rack does not conduct electricity. Thus, the static charges remain on the tips as they sit in the rack because there is no flow of the electric charge from the tips to the tip rack.  
20 The static charges on different tips and the rack itself cause some of the tips to repel away from each other and the rack. When the electrostatic charge is sufficient, this repelling action may cause one or more of the light-weight tips to become dislodged from the proper tip seats within the rack. In the worst situations, one or more tips may jump completely out of the tip rack as a result of the electrostatic forces between  
25 tips. When a tip becomes dislodged from a tip seat or jumps completely out of the tip rack, significant problems arise because loose tips may be lost and not properly discarded and removed from the testing area. Also, if in a subsequent step of a

laboratory process the head is scheduled to return to the tip rack and once again join the pipettes to the used set of tips, an improperly seated tip on the tip rack may be crushed by the force of the head as the head moves the pipettes into position to pick up the tips. This may result in operational failure of the multiple pipette device and/or  
5 faulty experiment results.

For the foregoing reasons there is a need for a multiple pipette system that will prevent tips from becoming displaced in the tip rack as a result of the triboelectric effect during loading and unloading of the tips. In addition, there is a need for a tip rack for use with a multiple pipette system that will prevent electrically charged tips  
10 from becoming displaced within the rack.

### SUMMARY

The present invention is directed to an apparatus that satisfies the need for a tip rack for use with a multiple pipette system that prevents electrically charged  
15 pipette tips from becoming displaced within the tip rack. The apparatus is a tip rack comprising a face having a plurality of seats formed thereon for holding pipette tips and at least one sidewall depending from the face. The face and the at least one sidewall of the tip rack are integrally formed as a one-piece conductive outer shell. The tip rack further comprises a support insert connected to the conductive outer shell  
20 such that the support insert is covered by the conductive outer shell. The support insert includes a plurality of support walls that form chambers dimensioned to receive the pipette tips.

The face and the at least one sidewall are comprised of an electrically conductive plastic material whereby static electricity deposited on the pipette tips is  
25 discharged through the tip rack when the pipette tips contact the tip rack. A number of different electrically conductive plastic materials may be used to form the tip rack. For example, the electrically conductive plastic material may include polypropylene

impregnated with carbon, metal flakes, metal powder or metal strands. In one preferred embodiment of the invention, the tip rack comprises about 15% or more carbon, by weight, and preferably, about 21% carbon, by weight.

When pipette tips having an electric charge deposited thereon are contacted  
5 with the tip rack, the electric charge deposited on the pipette tips is conducted through the electrically conductive tip rack and either delivered to ground or dissipated on the tip rack. Thus, when the pipette tips are seated in the tip rack, the pipette tips will not be displaced in the tip rack because any significant electrostatic charges on the pipette tips are conducted away from the pipette tips and through the tip rack. These and  
10 other features, aspects, and advantages of the present invention will become better understood with reference to the following description and the appended claims.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

Fig. 1 shows a perspective view of a multiple pipette device holding tips  
15 positioned over a tip rack;

Fig. 2 shows a perspective view and cutaway portion of the conductive plastic rack for pipette tips.

#### **DESCRIPTION**

20 With reference to Fig. 2, a conductive plastic tip rack 60 for pipette tips is shown. The conductive plastic rack includes a conductive outer shell 64 formed around a support insert 62. The support insert 62 is manufactured separate from the conductive outer shell 64, and the two pieces are designed to easily fit together to form the complete rack 60. For example, the support insert 62 and conductive outer  
25 shell 64 may snap-fit, or be joined using other connection means (e.g., screws, adhesives, etc.).

The conductive outer shell 64 is designed to receive the pipette tips 66. The conductive outer shell includes sidewalls 80 depending from the sides of a face 82, and a number of tip seats 84 formed upon the face 82. The tip seats are holes in the face 82 and are arranged in a rectangular fashion to form a matrix of tip seats. In the preferred embodiment of the invention, the face 82 and the sidewalls are integrally formed as a single piece to make up the conductive outer shell 64.

The conductive outer shell 64 is formed of any number of different plastics capable of conducting electricity or dissipating electricity. In one embodiment of the invention, the conductive outer shell is formed mostly of polypropylene and is filled with other material to make the outer shell conductive. For example, the polypropylene may be impregnated with about 15% or more carbon, by weight, to make the plastic conductive. Polypropylene impregnated with about 21% carbon, by weight, is one preferred conductive plastic, such as that manufactured by the RTP Company of Winona, Minnesota. However, any number of different materials, may be used for the conductive outer shell. For example, in addition to the use of carbon, the plastic may also be made conductive by including metal strands, metal flakes, metal powder in the plastic. Furthermore, instead of impregnating materials into the plastic before the rack is molded to its desired shape, the conductive plastic rack may be formed by coating on the exterior of the rack with conductive plastic material or metallic material.

The conductive plastic rack is capable of sufficiently conducting or dissipating electricity such that the electricity deposited on a tip placed within the tip rack will flow out of the tip and through the tip rack, thereby prevent the tip from repelling other tips within the rack with any forces significant to disturb the seated position of the other tips within the tip rack. To this end, the tip rack may be grounded to allow static electricity flowing through the tip rack to be grounded. However, if the tip rack is not grounded, the surface area of the rack is sufficiently large to dissipate

significant concentrations of static electricity throughout the rack, and avoid any problems wherein pipette tips are dislodged from their seats. Accordingly, the term "conductive plastic" as used herein is intended to cover both electrically conductive plastics and static dissipative plastics.

5           The support insert 62 serves as the skeleton for the plastic rack, providing structural support to make the rack 60 strong and sturdy. The support insert 62 is preferably made of polypropylene and may or may not include other material such as graphite to make the insert conductive. Although the support insert 62 is completely covered by the conductive outer shell 64, Fig. 2 shows a cutaway portion of the  
10       conductive outer shell that reveals the support insert 62. The insert 62 provides a number of support walls 70 that form chambers 72 for receiving pipette tips 66 when they are inserted into the rack. The support walls 70 provide a lightweight honeycomb structure that allows the face of the conductive outer shell to support a large amount of force. It is important that the face supports a large amount of force  
15       because of the substantial force exerted upon the face when the pipettes are attached to the pipette tips sitting in the rack. In addition, the support insert 62 includes a number of buttresses 68 around the outer support walls. These buttresses 68 fit against the sidewalls 80 of the conductive outer shell 64 when the conductive outer shell is joined to the insert 62, thereby providing additional structural support for the  
20       conductive outer shell. The two-part rack comprised of the conductive outer shell 64 and the support insert 62 may be manufactured for less cost than a one-piece rack because the more expensive conductive plastic material is only required to form the conductive outer shell 64, and the support insert 62 may be made of less expensive non-conductive plastic.

25           Each pipette tip 66 is made of polypropylene and includes a collar portion 90 and a conical body 92. The collar portion 90 includes an interior diameter, and this interior diameter of the collar portion is designed to securely fit around the end of a



pipette held by the multiple pipette device and thereby attaché the pipette tip to the pipette. The conical body 92 is the portion of the tip that receives and dispenses liquid to be transferred from one location to another. Fig. 2 shows a first portion 94 of the pipette tips removed from their seats 84 and a second portion 96 of the pipette tips positioned within their seats on the tip rack 60. As shown by the first portion 94 of the pipette tips, each pipette tip is placed in the rack by inserting the conical body of the pipette tip into one of the seats 84. As shown by the second portion 96 of pipette tips, when a pipette tip is properly positioned in a seat 84, the collar portion 90 of the pipette tip rests against the face 82 of the conductive outer shell 64 and the conical body 92 is received within one of the chambers 72 of the support insert. Thus, the diameter of each pipette seat 84 is large enough to pass the conical body 92 of a pipette tip, but small enough to prevent passage of the collar portion 90.

In operation, a robot transfers the rack 60 with seated polypropylene tips 66 to a loading area where a multiple pipette device will pick up the tips positioned within the rack. The head of the multiple pipette device comes into position over the rack 60 and the pipettes are inserted into the collars 90 of the pipette tips. The rubbing of the pipette tips with the collars creates a static electric charge on the tips. After the pipettes and their associated tips have been used to transfer liquids from one location to another, the tips are removed from the pipettes by the shuck plate (not shown). Once again, when the tips are removed from the pipettes, the tip collars 90 rub against the pipettes and electrostatic charges are generated and deposited upon the tips. However, when the tips fall into the seats of the tip rack and come into contact with the conductive outer shell of the rack, the electrostatic charge is conducted from the tips and through the rack to ground or dissipated within the rack. Thus, when the tips are placed in the rack, the tips do not repel against each other or the rack and are held securely in place within the rack by gravity. In this manner, the conductive plastic

rack for pipette tips prevents random failures resulting from electrostatic charges on the tips, and therefore makes operation of the multiple pipetting device more reliable.

Various tests were performed using the conductive plastic tip rack in a laboratory setting. In one test, the conductive outer shell was formed of polypropylene material impregnated with carbon such that the carbon comprised  
5 about 21% of the total weight of the polypropylene material. With this 21% carbon, by weight, polypropylene material, the tip rack reliably removed the problem of tips repelling within the tip rack at 17% relative humidity. It was found that in very low humidity testing environments of less than 10% relative humidity, additional humidity  
10 is sometimes required to prevent any significant repelling of the tips within the rack using the conductive outer shell formed of polypropylene material having about 21% carbon, by weight. However, other conductive or dissipative outer shells formed of other plastics may perform even more reliably in low humidity conditions.

Although the present invention has been described in considerable detail with  
15 reference to certain preferred versions thereof, other versions are possible. For example, the rack may be a single molded conductive piece and need not be comprised of an insert with a conductive outer shell. As another example, the tips themselves may also be manufactured of a conductive plastic material. Of course, many other versions of the invention are possible. Therefore, the spirit and scope of  
20 the invention should not be limited to the description of the preferred versions contained herein.

### CLAIMS

1. A tip rack for holding a plurality of pipette tips that have been removed from a plurality of pipettes, thereby causing static electricity to be deposited on the pipette tips, the tip rack comprising:
- 5 a. a face having a plurality of seats formed thereon for holding pipette tips; and
- b. at least one sidewall depending from the face;
- wherein the face and the at least one sidewall are comprised of an electrically
- 10 conductive plastic material whereby static electricity deposited on the pipette tips is discharged through the tip rack when the pipette tips contact the tip rack.
2. The tip rack of claim 1 wherein the face and the at least one sidewall form a one-piece conductive outer shell, and the tip rack further comprises a support insert connected to the conductive outer shell such that the support insert is covered by the
- 15 conductive outer shell.
3. The tip rack of claim 2 wherein the support insert comprises a plurality of support walls that form chambers dimensioned to receive the pipette tips.
4. The tip rack of claim 1 wherein the face and the at least one sidewall are formed of a conductive plastic material impregnated with carbon.
- 20 5. The tip rack of claim 4 wherein the conductive plastic material comprises about 15% or more carbon, by weight.
6. The tip rack of claim 5 wherein the conductive plastic material comprises about 21% carbon, by weight.
7. The tip rack of claim 1 wherein the face and the at least one sidewall are
- 25 formed of a conductive plastic material impregnated with metal flakes, metal powder or metal strands.

8. A method of discharging static electricity from a plurality of pipette tips held by a plurality of pipettes, the method comprising:
- a. providing a tip rack comprised of an electrically conductive plastic material, the tip rack including a face with a plurality of seats formed thereon for  
5 holding pipette tips;
  - b. removing the plurality of pipette tips from the plurality of pipettes; and
  - c. seating the plurality of pipette tips in the plurality of seats such that the static electricity deposited on the pipette tips is discharged through the tip rack when the pipette tips are contacted with the tip rack.
- 10 9. The method of claim 8 wherein the static electricity is discharged through the tip rack by conducting the static electricity to ground when the pipette tips are contacted with the tip rack.
10. The method of claim 8 wherein the static electricity is discharged through the tip rack by dissipating the static electricity on the surface of the tip rack when the  
15 pipette tips are contacted with the tip rack.
11. The method of claim 8 wherein the tip rack includes a one-piece conductive outer shell comprising the face, and the tip rack further includes a support insert connected to the conductive outer shell such that the support insert is covered by the conductive outer shell.
- 20 12. The method of claim 8 wherein the step of removing the plurality of pipette tips from the plurality of pipettes results in the generation of additional static electricity on the pipette tips that is discharged through the tip rack when the pipette tips are contacted with the tip rack.
13. In a tip rack for use with a plurality of pipette tips, the plurality of pipette tips  
25 having static electricity deposited thereon as a result of friction between the plurality of pipette tips and a plurality of pipettes when the plurality of pipette tips are inserted on and removed from the plurality of pipettes, and the tip rack comprising a face

having a plurality of seats formed thereon for holding pipette tips and at least one sidewall depending from the face, the improvement comprising:

the tip rack being formed of an electrically conductive plastic material whereby static electricity deposited on the pipette tips is discharged through the tip  
5 rack when the pipette tips contact the tip rack.

14. The tip rack of claim 13 wherein the face and the at least one sidewall form a one-piece conductive outer shell, and the tip rack further comprises a support insert connected to the conductive outer shell such that the support insert is covered by the conductive outer shell.

10 15. The tip rack of claim 14 wherein the support insert is formed of non-conductive polypropylene

16. The tip rack of claim 14 wherein the support insert is formed of conductive plastic material.

15 17. The tip rack of claim 13 wherein the tip rack is formed of a conductive plastic material impregnated with carbon.

18. The tip rack of claim 17 wherein the conductive plastic material comprises about 15% or more carbon, by weight.

19. The tip rack of claim 17 wherein the conductive plastic material comprises about 21% carbon, by weight.

20 20. The tip rack of claim 13 wherein the tip rack is formed of a conductive plastic material impregnated with metal flakes, metal powder or metal strands.

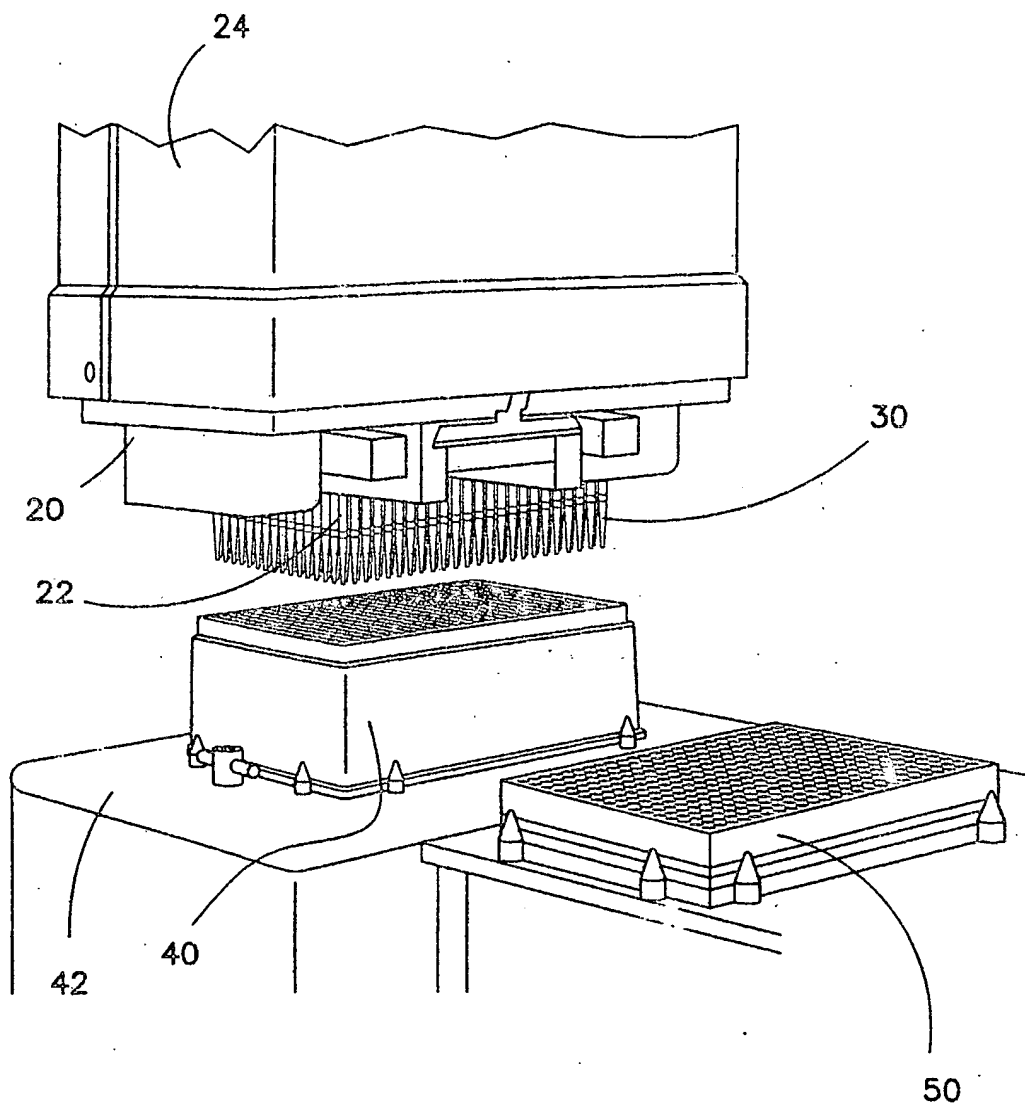


FIG. 1

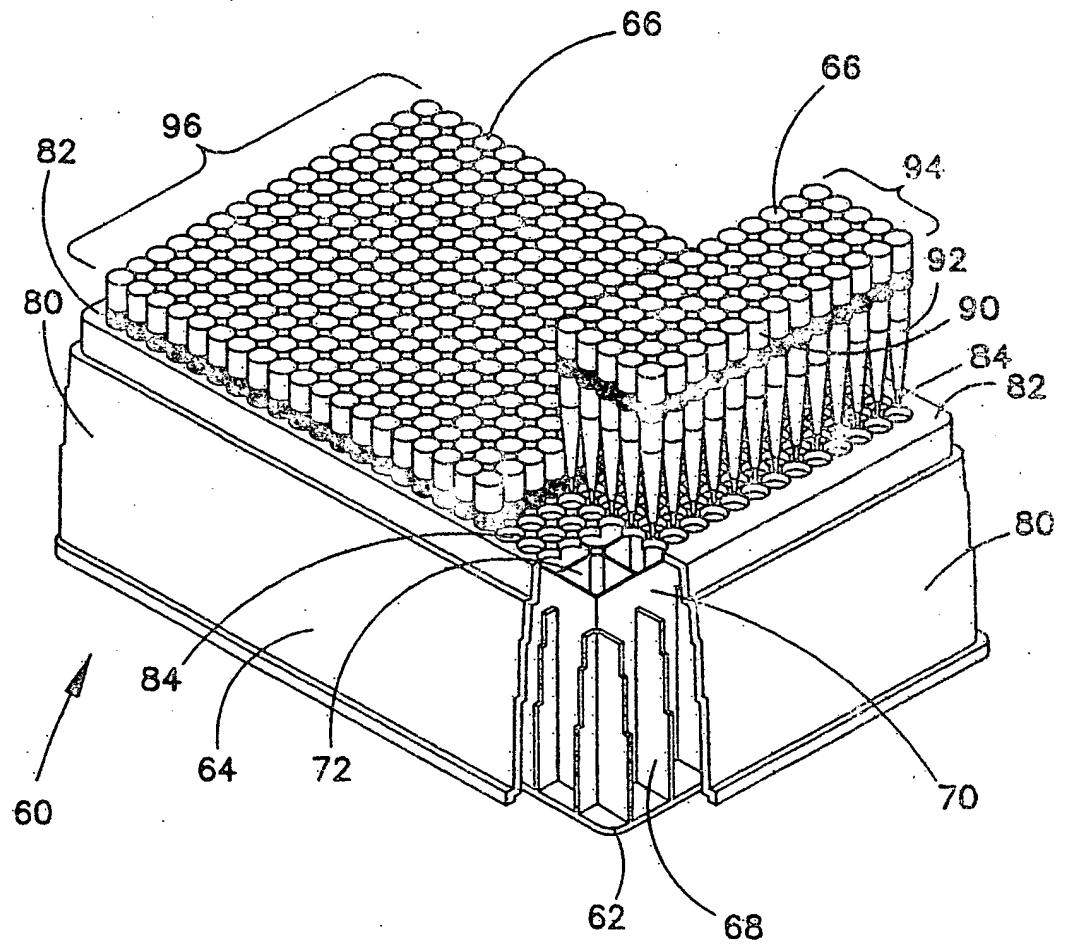


FIG. 2

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
19 September 2002 (19.09.2002)

PCT

(10) International Publication Number  
WO 02/072261 A3

- (51) International Patent Classification: **B01L 3/02** (74) Agents: MAY, William, H. et al.; Beckman Coulter, Inc.,  
4300 N. Harbor Boulevard, P.O. Box 3100, Fullerton, CA  
92834-3100 (US).
- (21) International Application Number: PCT/US02/06342
- (22) International Filing Date: 1 March 2002 (01.03.2002) (81) Designated State (national): JP.
- (25) Filing Language: English (84) Designated States (regional): European patent (AT, BE,  
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,  
NL, PT, SE).
- (26) Publication Language: English
- (30) Priority Data:  
60/275,761 14 March 2001 (14.03.2001) US  
10/071,726 8 February 2002 (08.02.2002) US
- (71) Applicant: BECKMAN COULTER, INC. [US/US];  
4300 N. Harbor Boulevard, P.O. Box 3100, Fullerton, CA  
92834-3100 (US).
- (72) Inventors: MORITZ, Jeffrey, R.; 1128 Hedgewood  
Place, Diamond Bar, CA 91765 (US). AVNET, Allan;  
10549 Morning Glory Circle, Fountain Valley, CA 92708  
(US).
- Published:  
— with international search report  
— before the expiration of the time limit for amending the  
claims and to be republished in the event of receipt of  
amendments
- (88) Date of publication of the international search report:  
21 November 2002
- For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: CONDUCTIVE PLASTIC RACK FOR PIPETTE TIPS

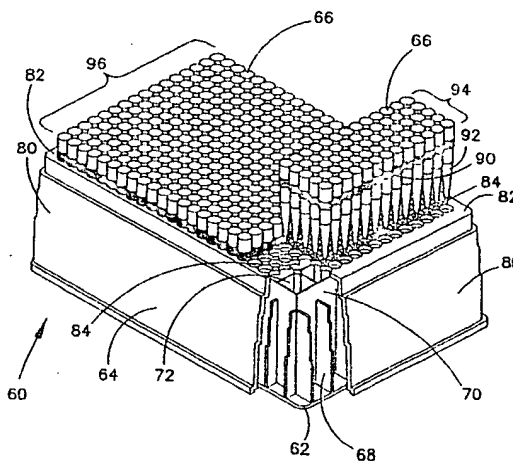

(57) Abstract: A conductive plastic tip rack (60) for pipette tips (66) includes a conductive outer shell (64) formed around a support insert (62). The support insert (62) serves as the skeleton for the tip rack (60), providing structural support to make the tip rack strong and sturdy. The conductive outer shell (64) includes sidewalls (80) depending from the sides of a face (82) having a plurality of tip seats (84) for receiving a plurality of pipette tips (66). The conductive outer shell (64) is formed of an electrically conductive plastic. The conductive plastic rack is capable of sufficiently conducting or dissipating electricity such that static electricity existing in a pipette tip (66) placed within the tip rack (60) will flow out of the pipette tip (66) and through the tip rack (60). By removing the static electricity from the pipette tips (66) placed in the tip rack (60), static electricity is prevented from disturbing the tips seated in the tip rack (60).



WO 02/072261 A3



## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 02/06342A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 B01L3/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 B01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 182 719 B1 (YAHIRO KANJI) 6 February 2001 (2001-02-06) column 3, line 6-16 column 4, line 16-40; figures 3,5 column 5, line 40-48; figure 7 ---	1-20
A	US 5 190 727 A (HIRSCH ALEXANDER) 2 March 1993 (1993-03-02) column 3, line 43-58; claim 1; figure 2B ---	1,13
A	EP 0 849 584 A (DADE BEHRING MARBURG GMBH) 24 June 1998 (1998-06-24) column 4, line 45-58; claim 1; figures -----	1-4

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

11 September 2002

Date of mailing of the international search report

19/09/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.  
Fax: (+31-70) 340-3016

Authorized officer

Semino, D

Form PCT/ISA/210 (second sheet) (July 1992)

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No  
PCT/US 02/06342

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6182719	B1	06-02-2001 JP 11326341 A	26-11-1999
US 5190727	A	02-03-1993 NONE	
EP 0849584	A	24-06-1998 DE 19652784 A1	25-06-1998
		AT 221652 T	15-08-2002
		CA 2225117 A1	19-06-1998
		DE 59707849 D1	05-09-2002
		EP 0849584 A2	24-06-1998
		JP 10197537 A	31-07-1998
		US 6214626 B1	10-04-2001

Form PCT/ISA/210 (patent family annex) (July 1992)

BNSDOCID: <WO\_\_\_\_\_02072261A3\_I\_>

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**